

Vykon JACE-200™

Overview

The Vykon JACE-200™ (Java Application Control Engine) is a compact, embedded controller/server platform. It combines integrated control, supervision, data logging, alarming, scheduling and network management functions with Internet connectivity and web serving capabilities in a small, compact platform. The JACE-2 makes it possible to control and manage external devices over the Internet and present real time information to users in web-based graphical views.



The JACE-2 is a member of the Vykon suite of Java-based controller/server products, software applications and tools, which are designed to integrate a variety of devices and protocols into unified, distributed systems. Vykon products are powered by the revolutionary Niagara^{AX} Framework®, the industry's first software technology designed to integrate diverse systems and devices into a seamless system. Niagara supports a wide range of protocols including LonWorks™, BACnet™, MODbus, oBIX and Internet standards. The AX Framework also includes integrated network management tools to support the design, configuration, installation and maintenance of interoperable networks.


Applications

The JACE-2 is ideal for smaller facilities, remote sites, and for distributing control and monitoring throughout large facilities. Optional input/output modules can be plugged in for applications where local control is required. The JACE-2 also supports a wide range of field busses for connection to remote I/O and stand-alone controllers. In small facility applications, the JACE-2 is all you need for a complete system.

The JACE-2 serves data and rich graphical displays to a standard web browser via an Ethernet LAN or remotely over the Internet, or dial-up modem. In larger facilities, multi-building applications and large-scale control system integrations, Niagara^{AX} Supervisor™ software can be used to aggregate information (real-time data, history, alarms, etc.) from large numbers of JACEs into a single unified application. The AX Supervisor can manage global control functions, support data passing over multiple networks, connect to enterprise level software applications, and host multiple, simultaneous client workstations connected over the local network, the Internet, or dial-up modem.

Features

- Embedded Power PC platform @ 250 MHz
- Supports open and legacy protocols
- Web User interface serves rich presentations and live data to a browser
- Run stand-alone control, energy management, and multi-protocol integration
- Standard and optional communications boards
- Can be expanded with optional 16 and 34 point I/O Modules
- Small compact design is easy to install and supports multiple power options
- Optional 16 and 34 point I/O modules

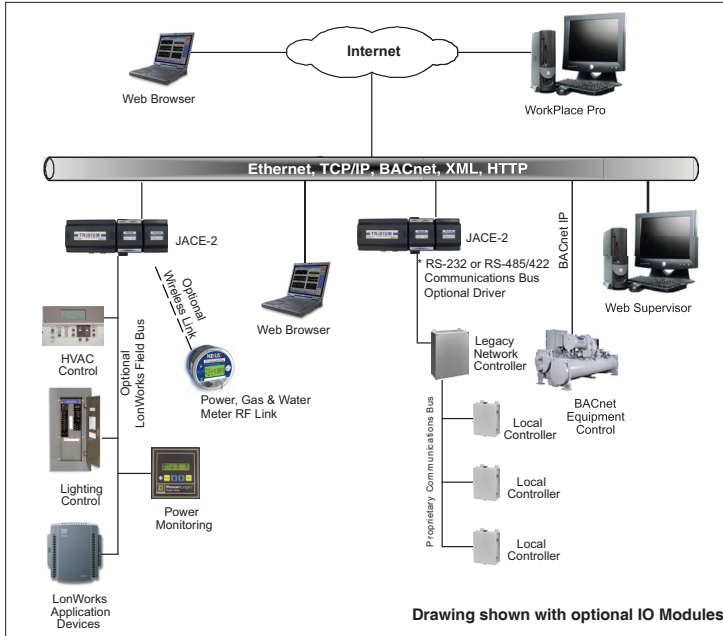

Drawing shown with optional IO Modules

Ordering Information

JACE-200

Base Unit including two Ethernet ports, one RS-232 port, and one RS-485 port. Web User Interface and Niagara Connectivity included. oBIX Client/Server driver included.

Specifications

Platform

- PowerPC 405EP 250 MHz processor
- 64MB SDRAM & 64 MB Serial Flash (optional 128 MB SDRAM)
- 128 KB Static RAM
- Battery Backup - 5 minutes typical - shutdown begins within 10 seconds
- Real-time clock - 3 month backup max via battery

Platform Options

NPB-128 - Memory upgrade option. Upgrades JACE-2 to 128 MB SDRAM

Operating System

- QNX RTOS
- IBM J9 JVM Java Virtual Machine
- Niagara^{AX}

Communications

- 2 Ethernet Ports – 10/100 Mbps (RJ-45 Connectors)
- 1 RS 232 Port (9 pin D-shell connector)
- 1 RS 485 non isolated port (3 Screw Connector on base board)

Optional Communications Cards

- **NPB-LON** - Optional 78 Kbps FTT10 A Lon Adapter
- **NPB-232** - Optional RS-232 port adapter with 9 pin D- shell connector
- **NPB-2X-485** - Optional dual port RS-485 adapter; electrically isolated

Power Supply

- **NPB-PWR** - Optional: 24 Volt AC/DC power supply module, Din Rail mounted

Optional Wall Power Modules –

(Note: All modules are universal input 90 – 240 volts, 50/60 Hz.; the model numbers below represent the various plug configurations only)

- **WPM-US** - 120 Vac, 50- 60 Hz. US
- **WPM-EU** - 230 Vac, 50-60 Hz. Europe/Asia
- **WPM-UK** - 230 Vac 50-60 Hz. UK

Chassis

- Construction: Plastic, din rail or screw mount chassis, plastic cover
- Cooling: Internal air convection
- Dimensions: 6.313" (16.04 cm) W x 4.820"(12.24 cm) H (including connectors) x 2.438" (6.19 cm) D

Environment

- Operating temperature range: 0° to 50°C (32°F to 122°F)
- Storage Temperature range: 0° to 60°C (32°F to 140°F)
- Relative humidity range: 5% to 95%, non-condensing

Agency Listings

UL 916, C-UL listed to Canadian Standards Association (CSA) C22.2 No. 205-M1983 "Signal Equipment", CE, FCC part 15 Class A, C-tick (Australia)

Optional I/O Modules

IO-34 - 34 Point I/O Module

- Max of 1 per Jace-200; includes integral 24 volt AC/DC input power supply for JACE 2 and IO; no other power required
- 16 Universal Inputs (0-1000 ohm, 0-10 volts, 0-20 MA with external resistor)
- 10 relay outputs (Form A contacts, 24 VAC @ .5 amp rated)
- 8 analog outputs (0-10 volt DC)

IO-16 - 16 Point I/O Module

- Up to 4 per Jace-200, 2 per Jace-200 if combined with a 34 Point I/O module
- 8 Universal Inputs (0-1000 ohm, 0-10 volts, 0-20 MA with external resistor)
- 4 relay outputs (Form A contacts, 24 VAC @ .5 amp rated)
- 4 analog outputs (0-10 volt DC)

www.tridium.com

North America

3951 Westerre Parkway, Suite 350
Richmond, VA 23233 USA
1.804.747.4771 Phone
1.804.747.5204 Fax

Europe, Middle East & Africa

1 The Grainstore, Brooks Green Road
Coolham, West Sussex RH13 8 GR UK
+44 (0) 1403.740290 Phone
+44 (0) 1403.741804 Fax

Asia Pacific

101 Cecil Street, #10-11
Tong Eng Building, Singapore 069533
+65.6.887.5154 Phone
+65.6.887.5342 Fax