

VYKON enterprise security field hardware

PRODUCT DEFINITION

Field hardware used for the VYKON Enterprise Security application includes remote reader modules, remote IO modules and intrusion keypads. The modules are connected to a JACE® embedded controller platform to remotely control and monitor security and access control devices. Using a standard RS-485 multi-drop communication bus, the modules can be located up to 4,000 feet from the JACE.



REMOTE READER MODULES

Remote reader modules provide an interface for two typical access controlled doors. Two Wiegand reader ports compatible with most standard Wiegand proximity readers are included, along with four supervised inputs for monitoring the status of doors and requests-to-exit, and two form C relay outputs for controlling door locks. Two additional non-supervised inputs are provided for monitoring the status of the enclosure door or power supply.



REMOTE IO MODULES

Remote IO modules provide eight supervised inputs for monitoring dry contacts from security devices, such as motion sensors, glass break detectors, door and window status switches, and other critical building alarms. Eight form C relay outputs may be used for controlling alarm indicating devices, elevator floor control, alarm dialers, door locks and other building equipment. Two additional non-supervised inputs are provided for monitoring enclosure door status or power supply status.

SYSTEM CAPACITIES

	JACE 8000
Access network	16 remote reader modules and/or remote IO modules in any combination

ORDERING INFORMATION

Part number	Description
SEC-R2R	Remote reader module includes connections for 2 card readers, 4 supervised inputs, 2 form c relay outputs and 2 digital inputs Manufactured in the USA
SEC-RIO	Remote IO module includes connections for 8 supervised inputs, 8 form c relay outputs and 2 digital inputs Manufactured in the USA

powered by

niagara
framework®

HARDWARE SPECIFICATIONS

Remote reader module


- Supply voltage: 12-15 VDC, .07 A
- (4) supervised digital inputs
- (2) form c relay outputs, 3A @ 24 V
- (2) digital inputs
- (2) Wiegand card reader ports
- (1) RS-485 communication port
- Operating temperature range: 0° to 50°C (32°F to 122°F)
- Storage temperature range: 0° to 60°C (32°F to 140°F)
- Relative humidity range: 5% to 95%, non-condensing
- DIN rail or surface mount

Remote IO module

- Supply voltage: 12-15 VDC, .4 A
- (8) supervised digital inputs
- (8) form c relay outputs, 3A @ 24 V
- (2) digital inputs
- (1) RS-485 communication port
- Operating temperature range: 0° to 50°C (32°F to 122°F)
- Storage temperature range: 0° to 60°C (32°F to 140°F)
- Relative humidity range: 5% to 95%, non-condensing
- DIN rail or surface mount

NIAGARA FOR ENTERPRISE SECURITY

JACE® 8000

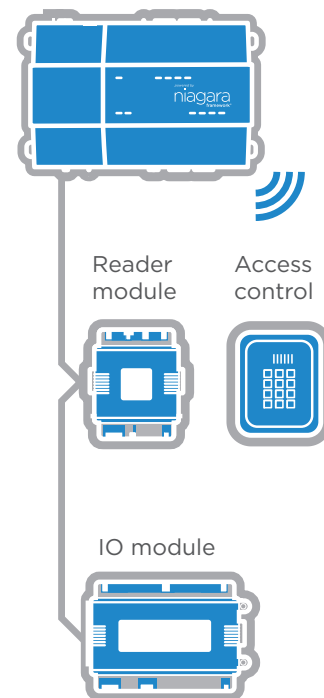

AGENCY CERTIFICATIONS

Remote reader module and remote IO module

- FCC part 15 Class A
- CE
- UL 294
- RoHS

To learn more about how to purchase, install and start using field hardware for the VYKON Enterprise Security application, contact your VYKON partner. The global community of certified Niagara professionals can serve your unique business needs across any industry or geographic region.



vykon.com

© 2021 Tridium Inc. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

Information and/or specifications published here are current as of the date of publication of this document. Tridium, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Richmond, Virginia. Products or features contained herein may be covered by one or more U.S. or foreign patents. This document may be copied only as expressly authorized by Tridium in writing. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form.

2021-0026VK